



# Dyson v6 Absolute Cyclone Replacement

The cyclone of the Dyson v6 Absolute can be easily replaced for regular cleaning and to check for blockages.

Written By: Tabitha Espina Velasco



## INTRODUCTION

If there are issues with the suction of the Dyson v6 Absolute, the cyclone may have to be cleaned or replaced.

---



### TOOLS:

- [Tweezers](#) (1)
  - [Heavy-Duty Spudger](#) (1)
  - [T9 Torx Screwdriver](#) (1)
-

## Step 1 — Bin



- Unplug the device.

## Step 2



- Push down the red lever located on the outside of the bin, next to the device handle.
- Avoid pressing the trigger on the handle opposite the red lever, which activates the motor.



## Step 3



- Push the red lever down a second time to release the bin.
- Avoid pressing the trigger on the handle opposite the red lever, which activates the motor.

## Step 4




- Pull bin away from the cyclone.

## Step 5 — Main Body



- Separate the bin from the main body of the device.


## Step 6

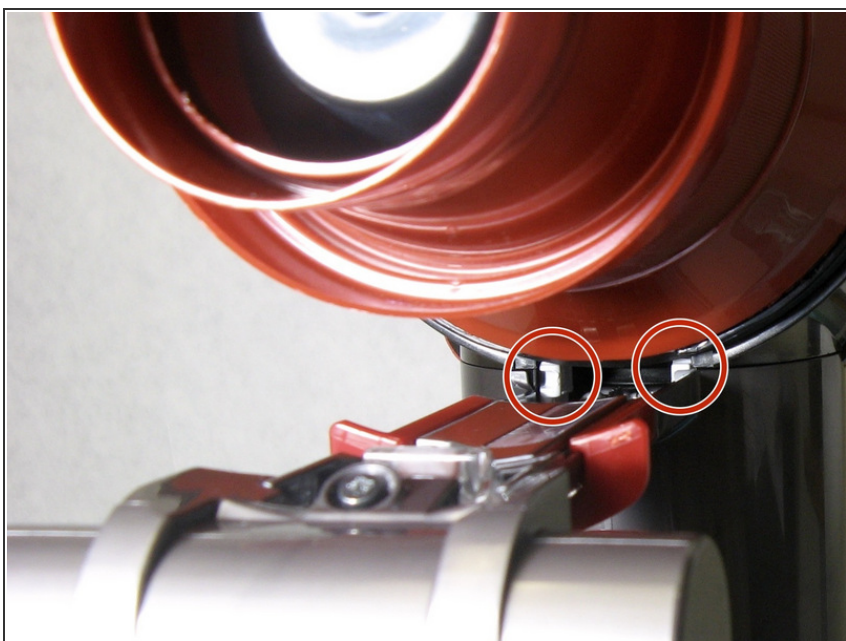

- Locate two visible white clips between the main body and the cyclone.



## Step 7

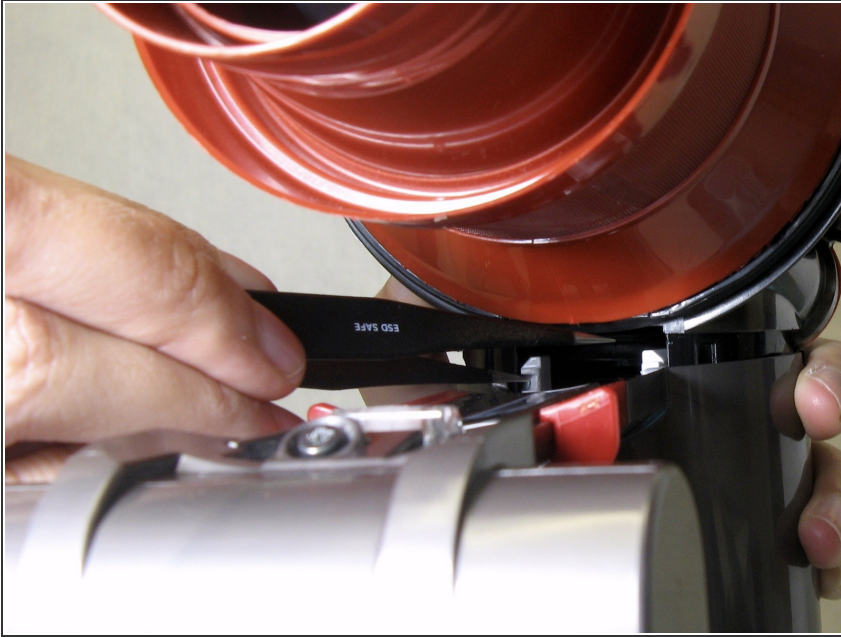

- Use tweezers to pinch the white clips together.
- Widely hold the tweezers apart to get them to reach between the two white clips.
- Because the space is tight between the cyclone and the main body, pinching the white clips may require additional effort.

## Step 8




- Tilt and pull the main body away from the cyclone.
- There may be a loud snap when the main body separates from the cyclone.

## Step 9 — Cyclone



- Use the spudger to remove the cyclone.
- Start at the small opening beneath the place where the cyclone connects to the main body.
- Work the spudger around the rim of the red screen filter.
- You will hear popping noises.


## Step 10

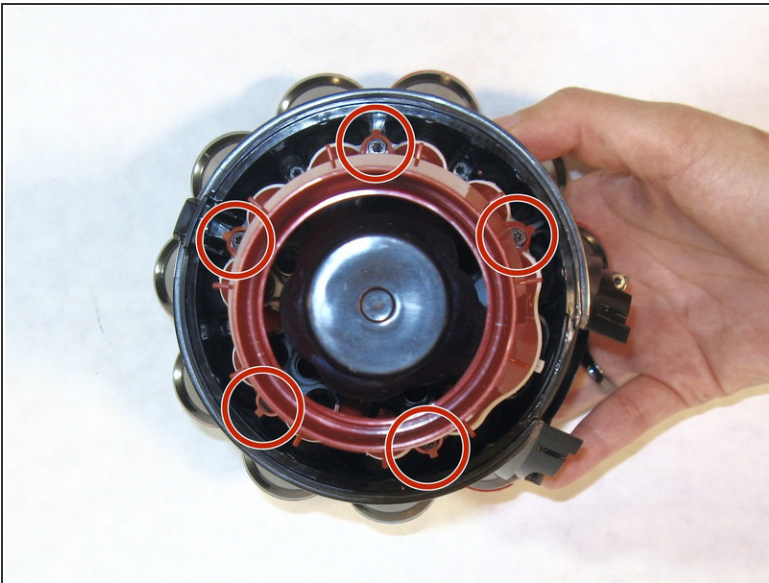

- Use a T9 Torx screwdriver to remove five 14mm screws from the edge of the screen filter body.



## Step 11

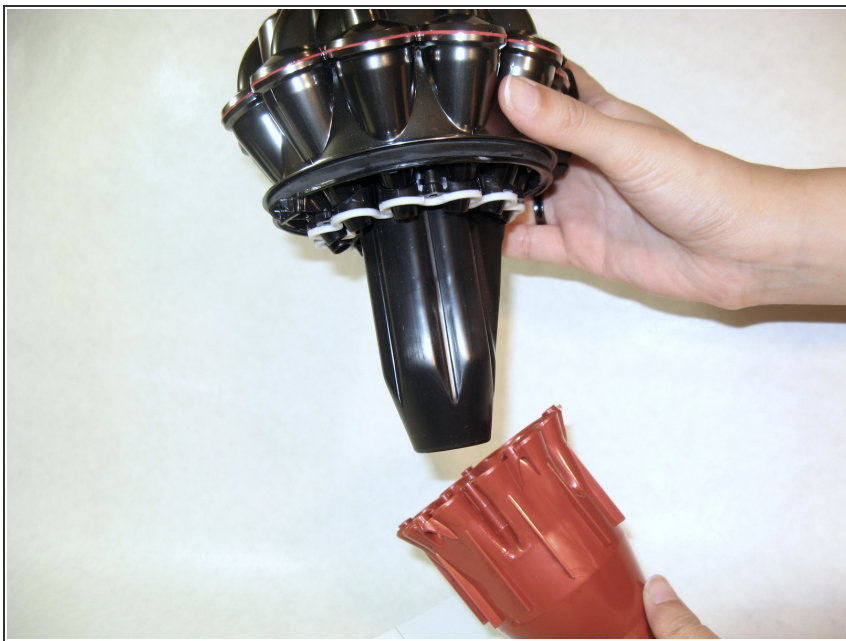

- Remove the filter screen cover away from the cyclone.
- Pull down on the black tube inside the cyclone body to remove it from the cyclone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 08:30:25 PM.